



boot & Modular Plug

RJ45 CAT.5E UTP



5.5mm Ø

RJ45 CAT.6 UTP



6.0mm Ø



6.3mm Ø

RJ45 CAT.5E
UTP/FTP
雙排單件式




7.0mm Ø

CAT.6 FTP
雙排三件式



7.0mm Ø

CAT.6A FTP

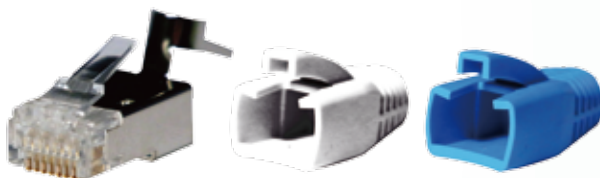

8.0mm Ø

RJ11/12 Telephone
兩叉大拐腳(單股線用)



◆ 符合標準

- 符合標準：FCC Part 68 Standard
- 規格說明：
- RJ 45 /12/11 8P8C/6P6C/6P4C
- UTP 2叉/3叉
- FTP 2叉/3叉

◆ 材質特性

- 本體材質：P.C. PVC：UL94V-0 /2
- 耐電壓：500 V AC 250V @ 2A
- 絕緣阻抗：100 M Ω.
- 線纜抗張：>100N
- 接觸面耐插拔：1000 次
- 安裝線導體：23/24/26 AWG (O.D. 0.95~1.05mm)
- 表面鍍金：50u"

A09